



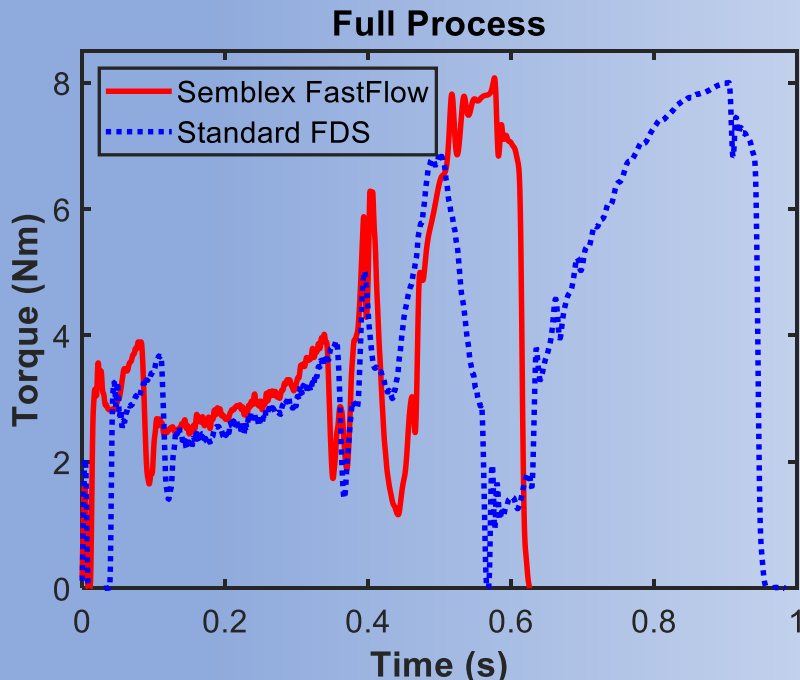


FastFlow™ FDS

- Self-piercing and extruding screw with special FastFlow™ FDS® thread
- Reduces thread forming and tightening time
- Potential for less than 1 second total process time
- Provides assembly without clearance holes
- Requires only one-sided installation

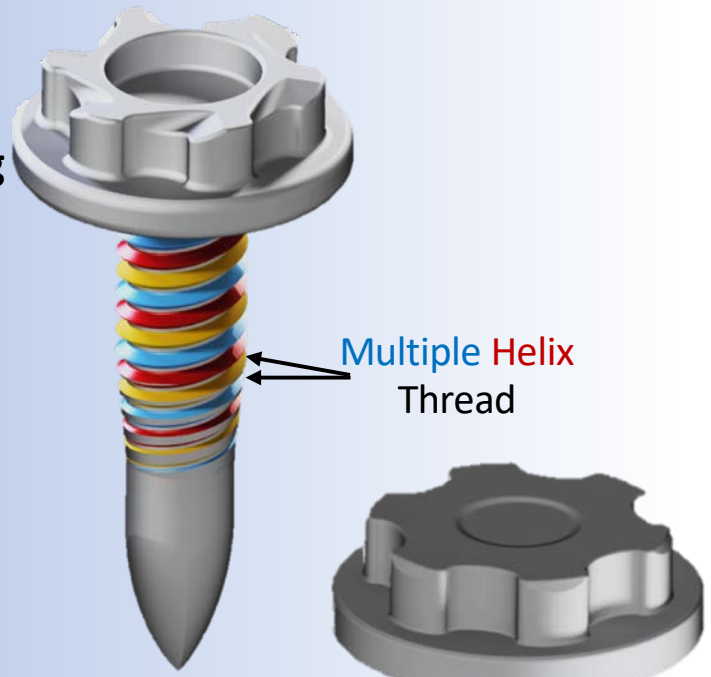

Data for 2mm on 2mm 6061-T6 Aluminum stackup on DEPRAG Adaptive DFS

FastFlow™
FDS®



Standard
FDS®