





FastFlow[®]



- Self-piercing and extruding screw with special FastFlow[®] FDS[®] thread
- Reduces thread forming and tightening time
- Potential for less than 1 second total process time
- Provides assembly without clearance holes
- Requires only one-sided installation

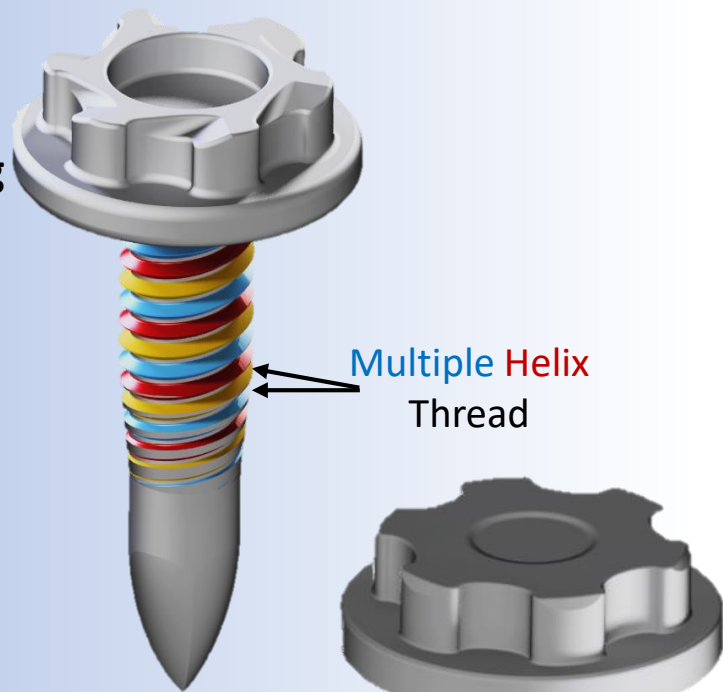


Full Process

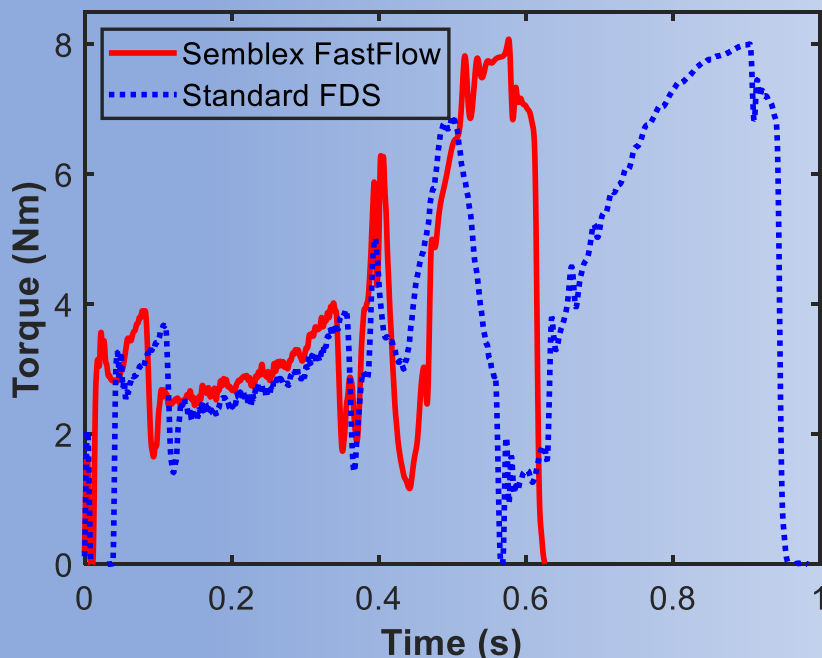

Data for 2mm on 2mm 6061-T6 Aluminum stackup on DEPRAG Adaptive DFS

FastFlow[®]
FDS[®]

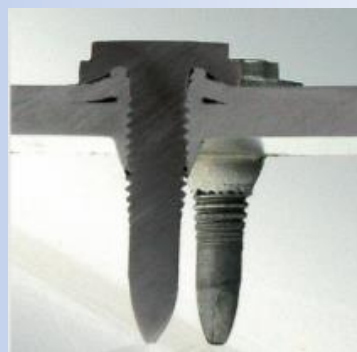

Standard
FDS[®]